


NO. 24 ANTHEUIL



VERSION 2



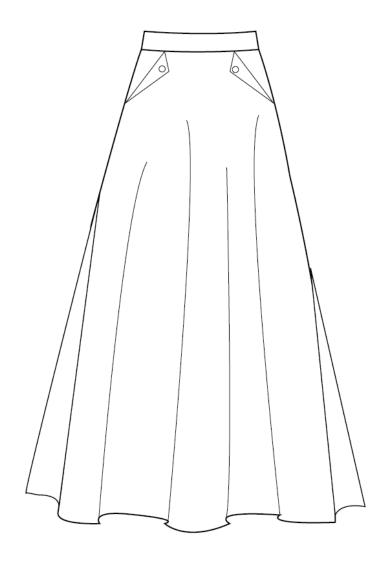










Cutting

On each pattern piece, you will find a capital letter. On the cutting layout plan, you will find the same capital letters so that you can easily see which pattern pieces to use for the view you have chosen.

YOU WILL NEED THE FOLLOWING PATTERN PIECES:

A, B, D, E

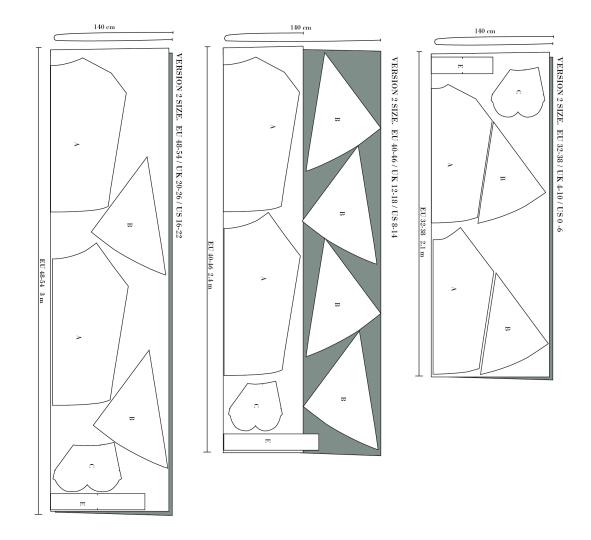




Sewing


NB! THE PATTERN HAS 1 CM SEAM ALLOWANCES INCLUDED UNLESS OTHERWISE NOTED.

- 1. Cut all your pieces in fabric and interfacing as needed. !NOTE! Cut Patter piece (A) 1x on fold and cut (A) 2 x times, not on fold.
- 2. Press the interfacing to the waistband (e), and a piece of stay tape in the pocket fold on the front (A). Place the stay tape between the notch on the waistline and the notch on the hip.

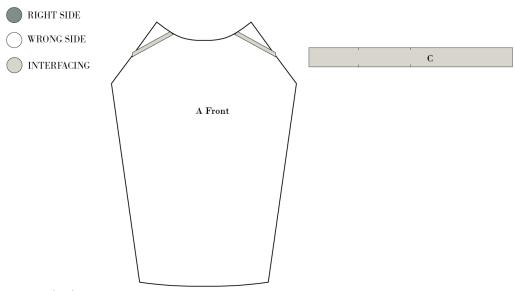


3. Overlock

- -The slanted seams on the front and back (A)
- -The longest on the side panel.

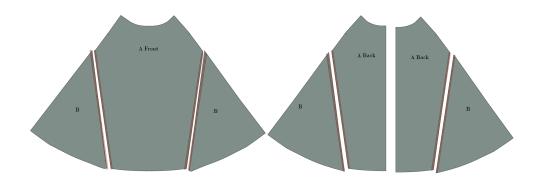





4. Place the side panel (B) on the slanted side on the front and on the back (A) with right sides together, and sew them together.

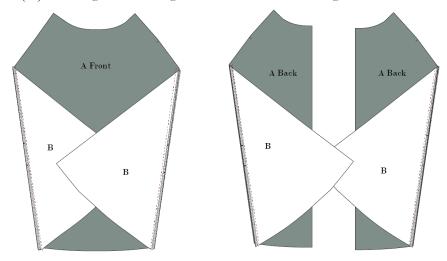

- 5. Press the seams open.
- 6. Place a pocket bag to the front, right sides together and sew the pocket opening. Under stitch the pocket bag.




- 7. Turn and press the flap. If necessary, clip a notch to the seam to release the seam allowance.
- 8. Fold the pocket bag in the fold line, right sides together.
- 9. Sew the two pocket bags together

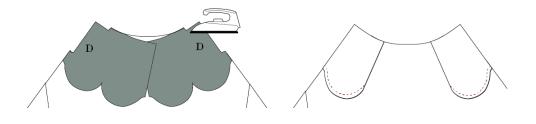




10. Overlock

- -The pocket bag.
- -Side seams, back and front.
- -Centre back seams

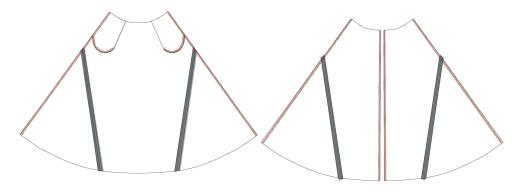


11. Sew the side seams, right sides together. Press seams open.

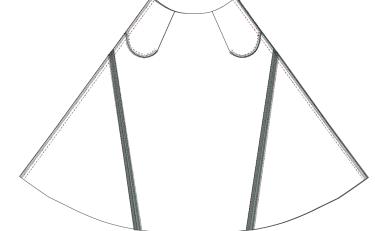

12. Finish the seam of one side of the waistband. I do it with a bias tape alternatively you can overlock it.




- 13. Place the raw edge of the waistband, to the waist of the skirt, right sides together.
- 14. Sew the waistband to the skirt and press the seam upwards.

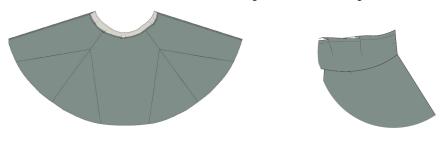




Sew the invisible zipper in. Se a video


- 15. Place the right side of the zipper allonge the edge of the centre back. Place the first teeth of the zipper in the same height as the notch in the waistband.
- 16. Base stitch the zipper to the skirt
- 17. Flip the teeth of the zipper aside and sew the zipper in place.

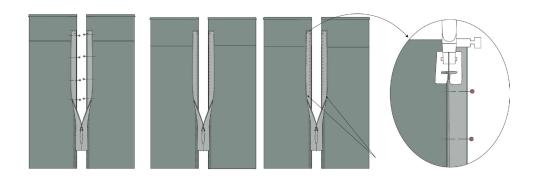

- 18. Sew the centre back seam below the zipper.
- 19. Press seam open and press gently on the zipper.

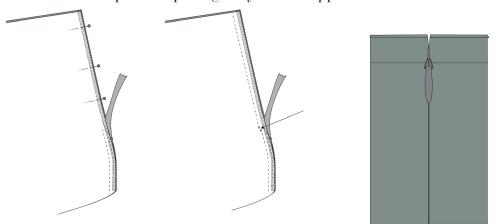


20. Open the zipper and fold the waistband around the zipper. Stitch as close as possible to the zipper as possible, sandwiched between the skirt and waistband, making sure to catch the extra zipper in the seam.





- 21. Turn the waistband to the right side, so the zipper is placed in between the layers of the folded waistband.
- 22. Finish the waistband by stitching in the ditch from the right side of the skirt.

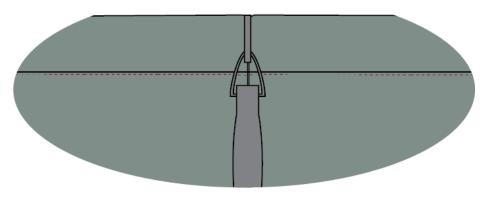

23. Hem the skirt with a narrow hem by folding 0.5 cm X 0.5 cm see how-to honline