




NO. 11 MALMØ



VERSION 1

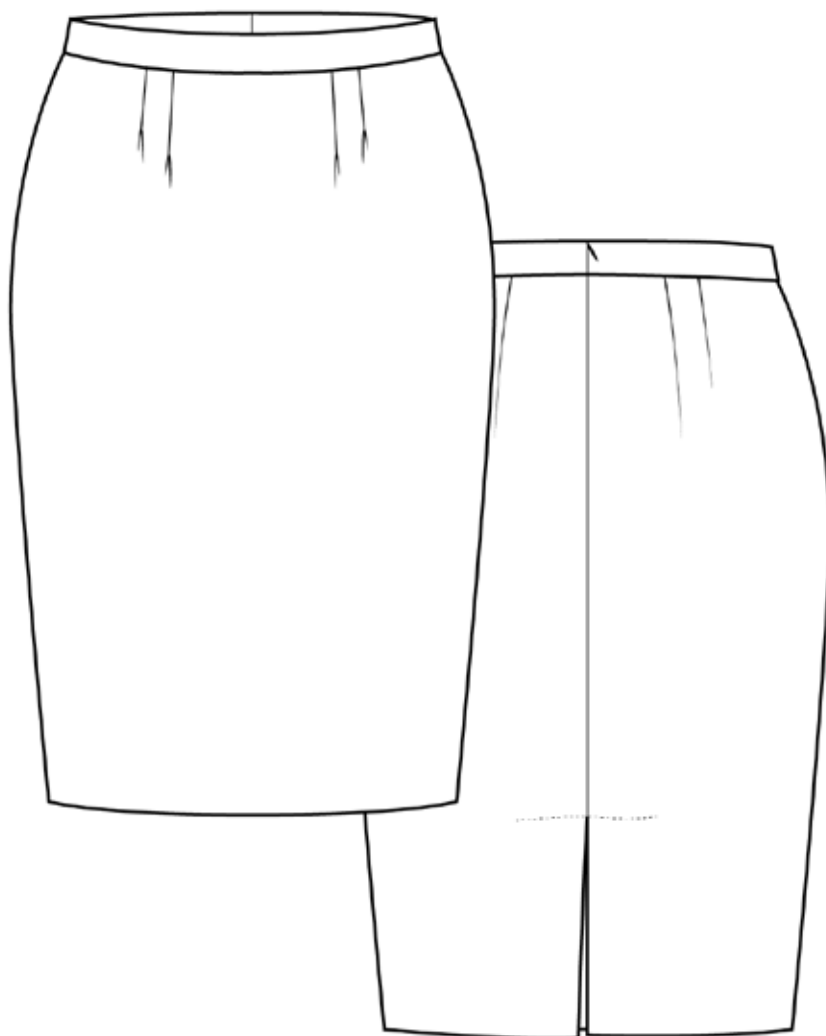



CUTTING

On each pattern piece you will find a capital letter. On the cutting layout plan, you will find the same capital letters so that you can easily see which pattern pieces to use for the view you have chosen.







Sewing

NB! The Pattern Has 1 Cm Seam Allowances Included, Unless Otherwise Noted.


1. Cut all pieces according to the cutting layout plan.
2. Press interfacing to the waistband (D)

Sew The Skirt

3. Sew the back darts. Press them towards centre-back.

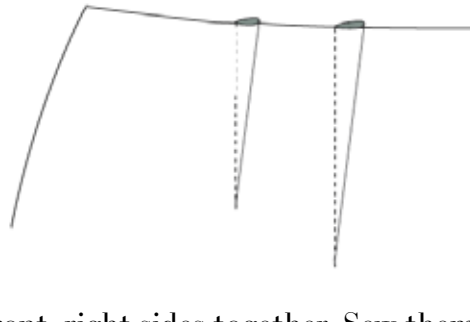


4. Fold the darts on the front, right sides together. Sew them accordingly to the marks on the pattern. Press towards CF.

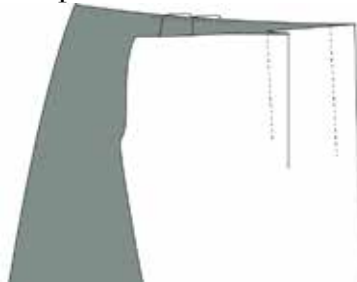

5. Finish the seam allowances of the side seams and the centre-back seam. See guide online


6. Finish the seam allowances of one of the long sides of the waistband.

7. Sew the side seams, right sides together. Press the seam allowances open.

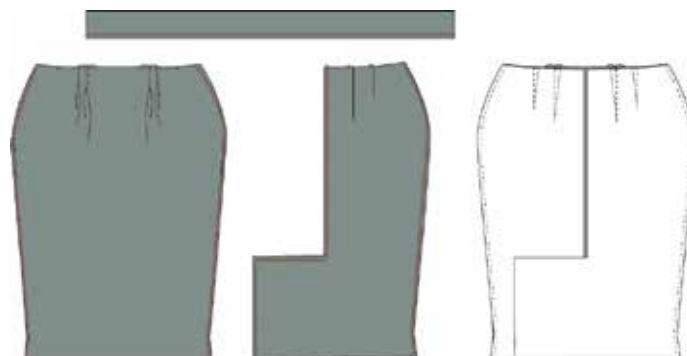




8. Finish the hem.

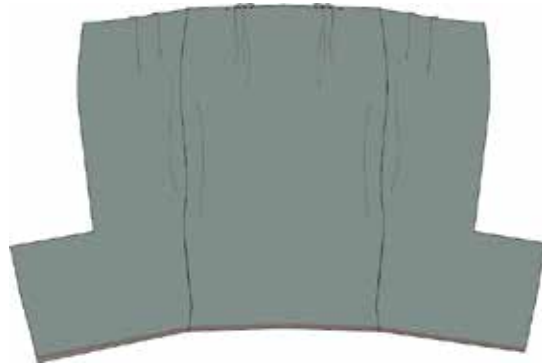


9. Place the waistband at the waist of the skirt, right sides together, and sew it in place. Press the seam allowance into the waistband.

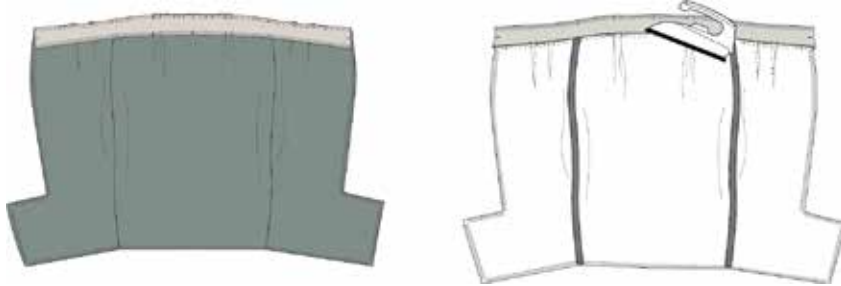


10. Sew the zipper in place. The zipper should end at the notch on the waistband. See guide online.

11. Fold the waistband around the zipper, so that the fabric is right sides together and sew the end of the waistband to the zipper. See guide online.

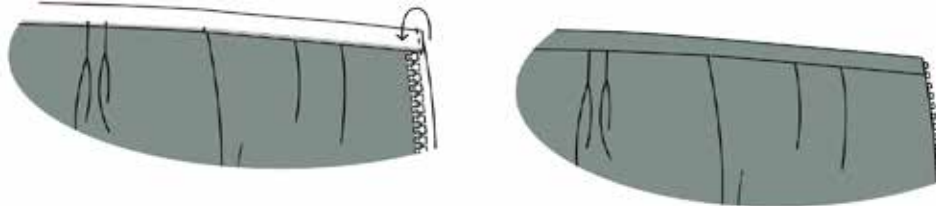


12. Turn the waistband to the right side so that the zipper is placed in between the layers of the folded waistband.

13. Finish the waistband by stitching in the ditch from the right side of the skirt.

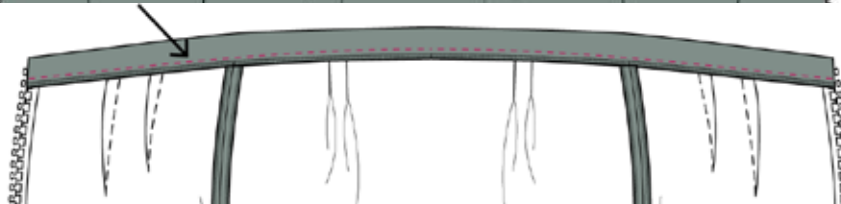




14. Sew the centre-back seam from zipper to vent, and the centre-back vent part. Press the seam allowances open and fold the vent according to the markings.

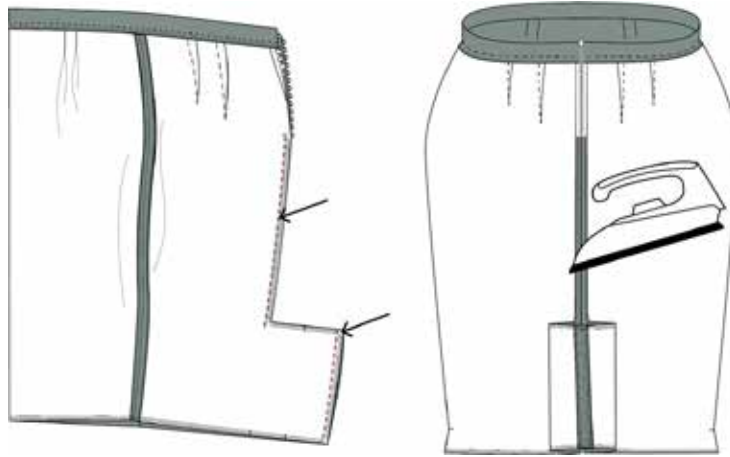

15. Hem the skirt. with catch stitch. See guide online.

16. Sew the vent to the back piece with a topstitch.

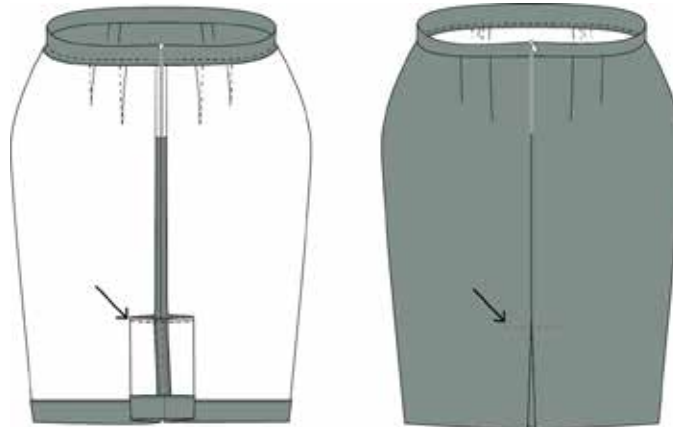

17. Sew the hook-and-eye in place above the zipper.
