


NO. 19 CHICAGO



VERSION 2



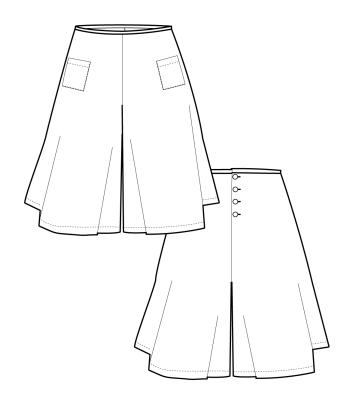










Cutting Match the lettered pattern pieces (A, B, C etc.) to the cutting layout plan for the view you have chosen.

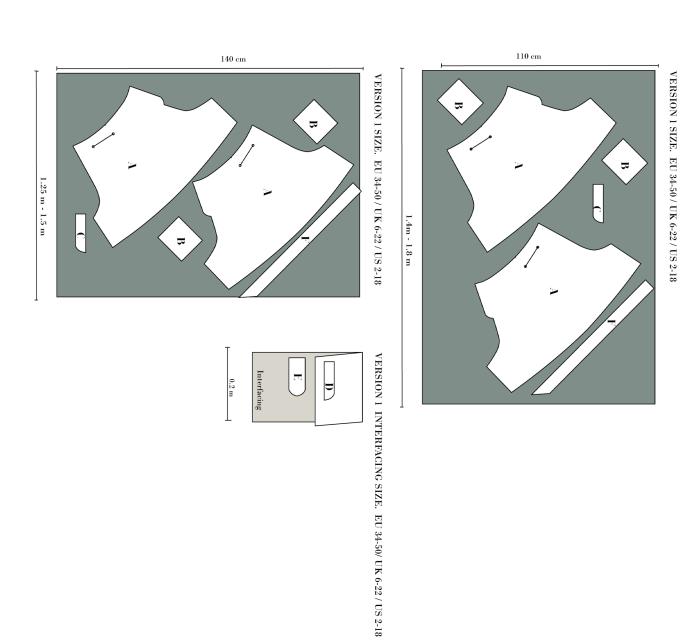

BIAS TAPE FOR WAISTBAND

	34/6/2	36/8/4	38/10/6	40/12/8	42/14/10	44/16/12	46/18/14	48/20/16	50/22/18
CM	76,5	80,5	84,5	88,5	93,5	98,5	104,5	110,5	116,5
INCH	30,1	31,7	33,3	34,8	36,8	38,8	41,1	43,5	45,9





Sewing NB! THE PATTERN HAS 1 CM SEAM ALLOWANCES INCLUDED UNLESS OTHERWISE NOTED.

1. Cut out all pieces in fabric


NB!

- 2. Pattern piece A & B is cut on the bias.
- 3. The waistband is cut on the bias.
- 4. Press interfacing onto the fly parts see drawing.
 - a. Pattern piece E to the right piece.
 - b. Pattern piece D to the left piece.
 - c. Pattern piece D to the fly.
- RIGHT SIDE
 WRONG SIDE
 INTERFACING






- 5. Overlock
- a. Inner seam.
- b. Crotch.
- c. Straight edge on the fly.
- d. Pockets all sides.

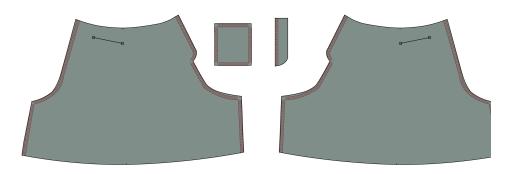





- 6. Hem the top (long side) of the pocket with 2.5 cm
- 7. Topstitch 2 cm from the folded edge.
- 8. Fold the rest of the sides with 1 cm, wrong sides together.

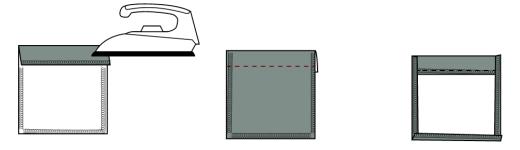

9. Place the pocket on the trousers using the markings on the pattern. Top stitch the pocket in place, 0.2 cm from the edge.

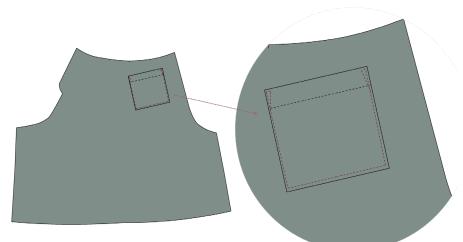


- 10. Sew the fly to the left trousers piece, right sides together.
- 11. Clip notches on the curved seam, turn and press.
- 12. Fold the fly at the notch on the right trousers piece. Turn right sides out and press

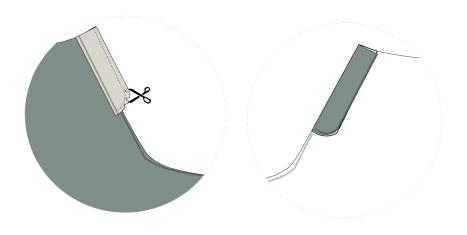





- 13. Sew the inner seam, right sides together. Press seam open.
- 14. Sew the crotch, right sides together. Stop the seam 1 cm after the fly curve. Press seam open as far as you can.

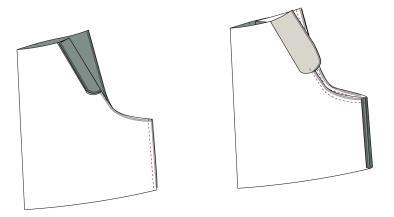

15. Sew the ends at the bias-cut waistband, right sides together. Turn and press.




16. Place the waistband to the right side of the waistline. At the underlap and overlap sew the waistband in a sandwich.

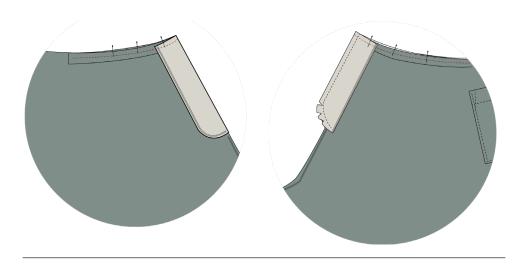



- 17. Overlock the waist seam
- 18. Turn and press down
- 19. Sew buttonholes on the overlap -see markings on the pattern.
- 20. Sew on buttons.
- $21.\quad$ On the wrong side, sew together the fly-underlap and overlap in the curve.

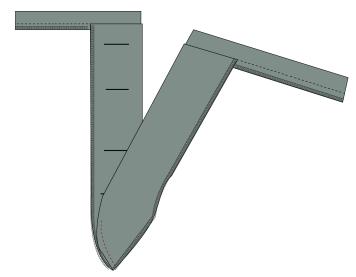

22. Hem the Trousers with a narrow hem or a rolled seam.