



NO. 22 TANGIER



VERSION 1






Cutting

On each pattern piece, you will find a capital letter. On the cutting layout plan, you will find the same capital letters so that you can easily see which pattern pieces to use for the view you have chosen.

**YOU WILL NEED FOLLOWING PATTERN PIECES:
A,B,C,D,E,F,H,I,J,K,L,M,N,O,P,Q**

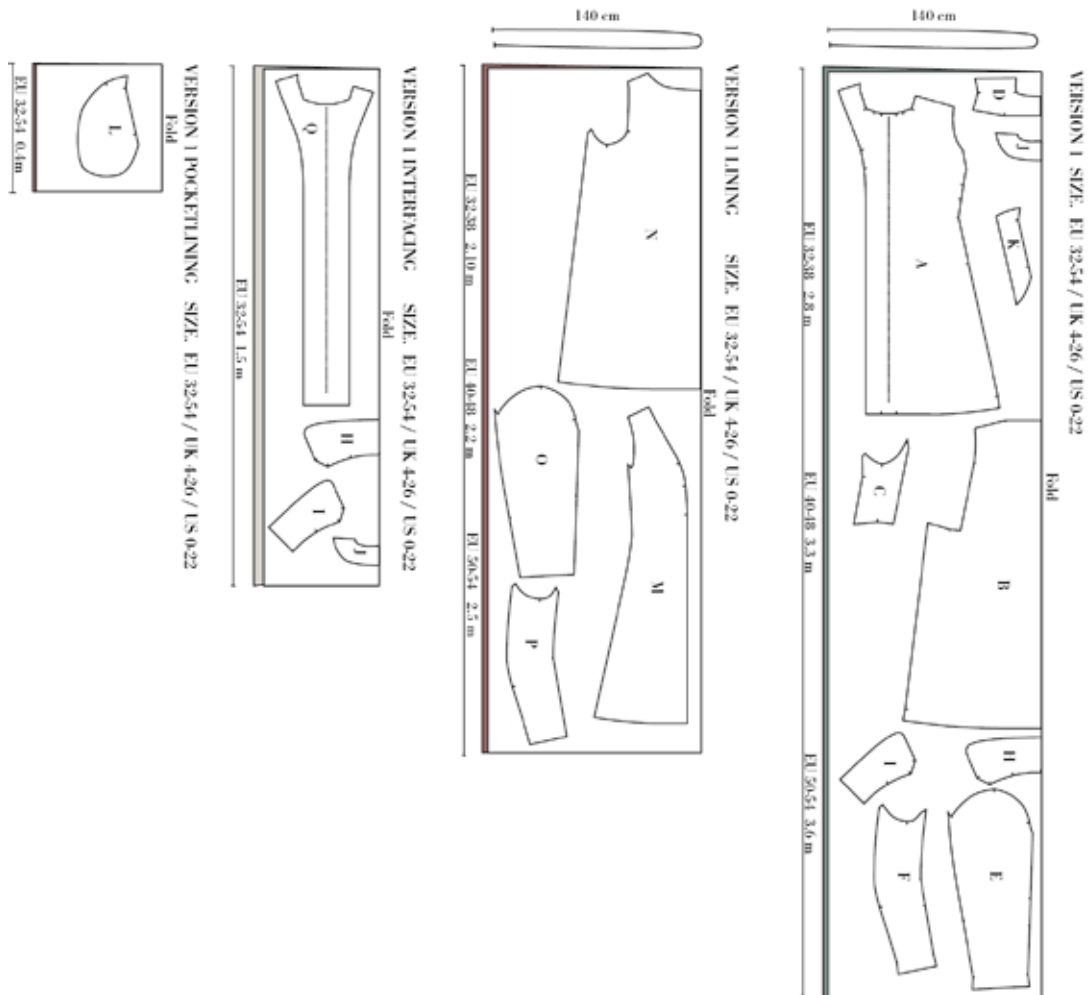




Sewing

Nb! The pattern has 1 cm seam allowances included unless otherwise noted.

1. Cut all your pieces in fabric, lining, pocket lining and interfacing as needed. Remember to mark all the notches when cutting.
2. Press the interfacing (Q) to the front piece (A), neck facing (J), upper collar (H) and under collar (I). On the back (B), press a small piece of interfacing to the corners as shown in the drawing below. Also, press a long strip of interfacing to the side seam on both front (A) and back (B) between the pocket notches. 20 cm long and 2 cm wide.

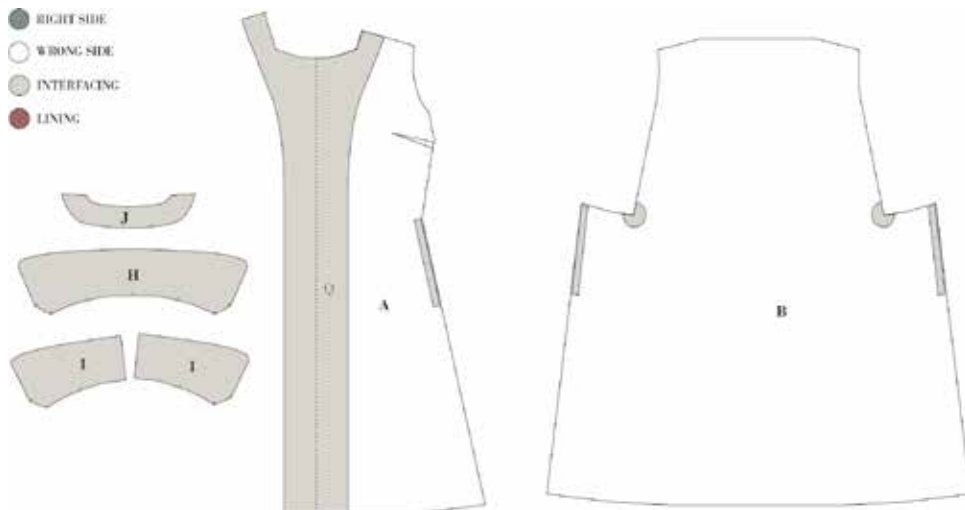


3. Sew the darts on the front (A) right sides together. Fold according to the notches and markings. Press the dart upwards.

4. Place the long side of the side piece, according to the notch (C), to the back piece (B) right sides together. Sew the two pieces together, stopping the seam 1 cm before the edge of the side piece. Backstitch.





5. Clip the corner of the seam allowance on the back piece (B). Now you can turn the side piece and sew the bottom. Press seam open.

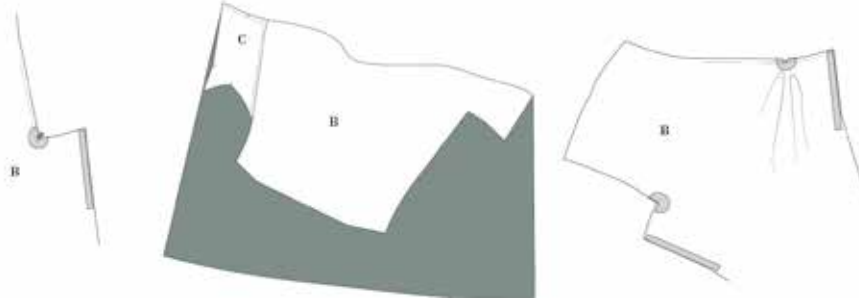

- 6. Sew the yoke (D) to the back piece according to the notches, with right sides together. Press seam towards the yoke .





SEW THE POCKETS

7. Overlock the long side of the pocket facing (K).

8. Place the pocket facing (K) on top of one of the pocket bag (L)


9. Sew the Pocket facing (K) to the pocket bag (L). The stitch line should be in the middle of the overlock seam on the long edge of the facing (K).

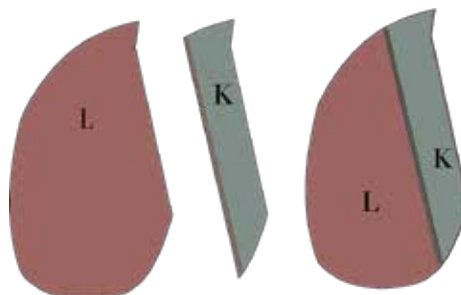




10. Place the pocket bag without the pocket facing (K) between the markings in the side seam of the front (A) right sides together . Sew between the markings. See a video on how to sew a side seam pocket.

11. Clip notches to the seam allowance. Cut close to the seam.

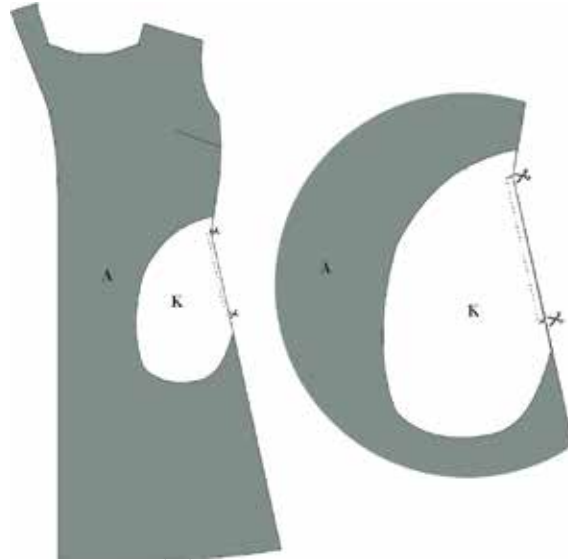


12. Flip the pocket bag (L) out, press and understitch the pocket bag to the front (A).

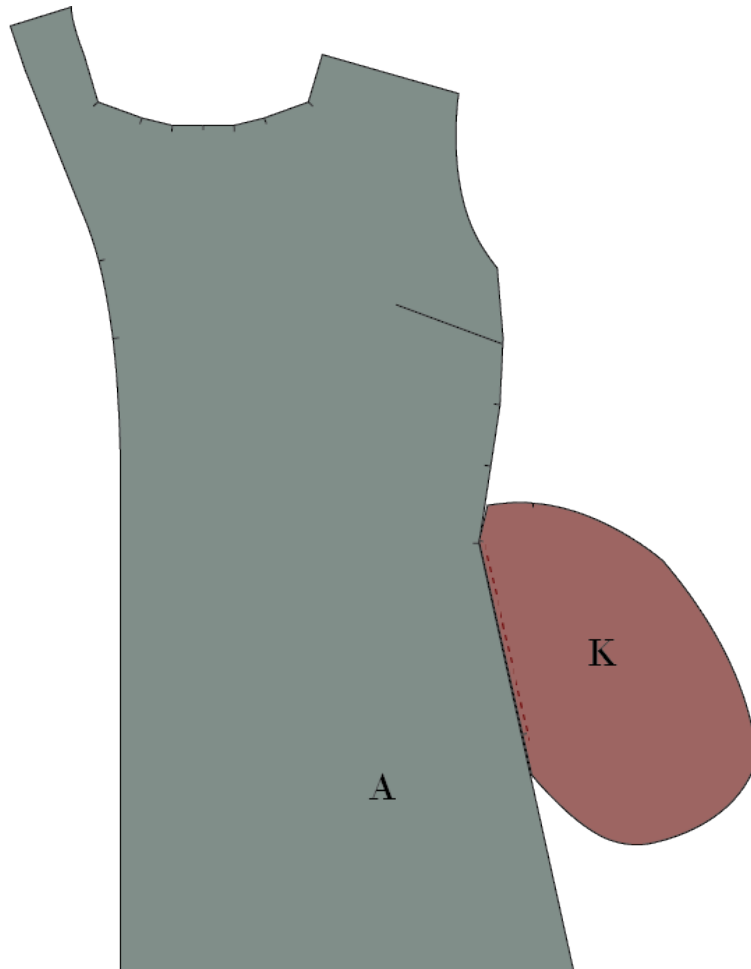




13. Press the pocket bag to the wrong side of the front piece. Then place the pocket bag with the pocket facing on top. Sew the pocket bags right sides together. Sew twice to make the seam stronger.

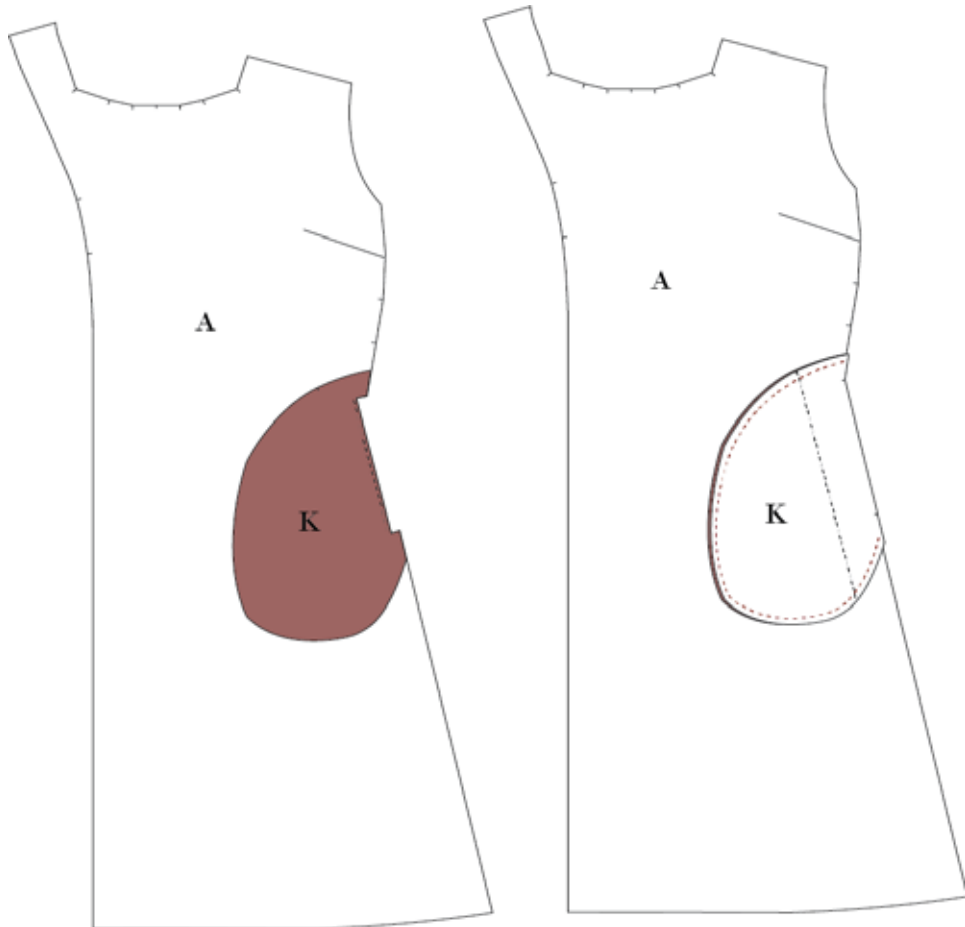

14. Sew the front piece (A) and the back piece (B) together at the side seam matching the waist seam to the upper side of the pocket opening, right sides together. Note! Be careful not to sew the pocket closed while at the same time making certain to catch the upper and lower corners of the pocket bag with the side seam. Press seams towards the back piece.

15. Sew the shoulder seams, right sides together. Press seam upwards.

16. Press a 4 cm wide interfacing piece to the hemline. stop 7 cm before front See a guide on how I make it.

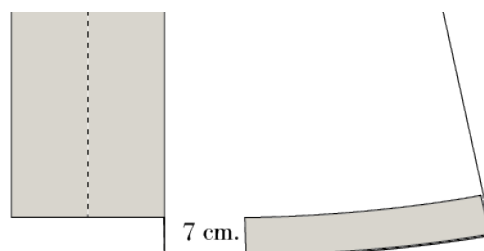




SEW LAPLE- SEE VIDEO

17. Sew the undercollar (I) together at the center back. Press seam open.

18. Sew the neck facing (J) to the front (A) at the shoulders - right sides together. Press seams open.

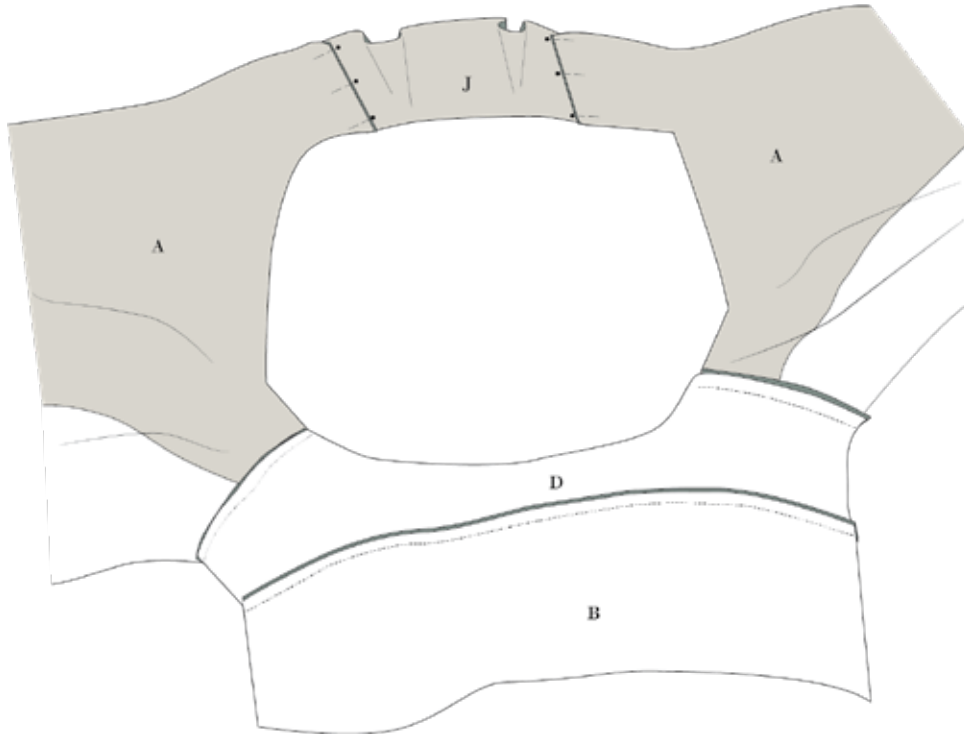


19. Mark the seam allowance on all corners in the front neckline (A) and the collar (H & I); these markings will be your anchor point when attaching the collar to the neckline.

20. Pin the undercollar to the coat from center back to the first marking (A1). – Stitch the under collar to the neck from notch H1 to H1, and backstitch at both the beginning and end of the seam. Make sure to hit the anchor points exactly.


21. Clip a notch in the corner (A1) close to the stitch. **NOTE!** Only clip in the coat (A)

22. Turn the collar to fit the next marking (H2 to A2) you have made and sew; remember to backstitch at both the beginning and end of the seam. Make sure to hit the anchor points exactly.

23. Sew the upper collar the same way. this time to the facing part of the neckline.

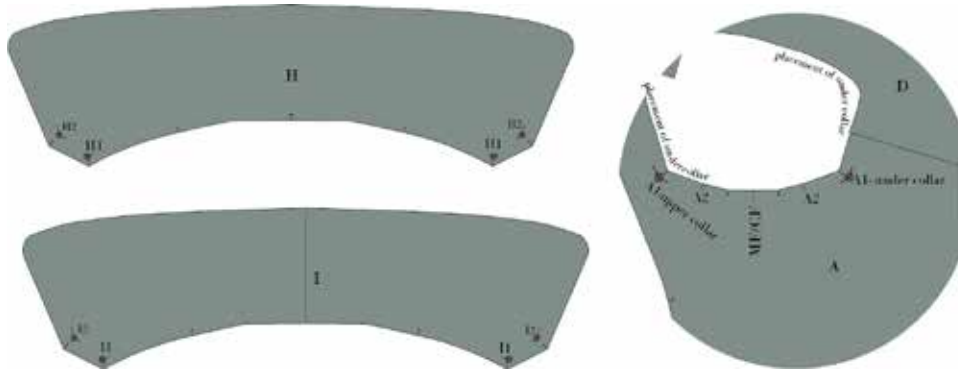


24. Press all seams open and cut away excess seam allowance. - see video.

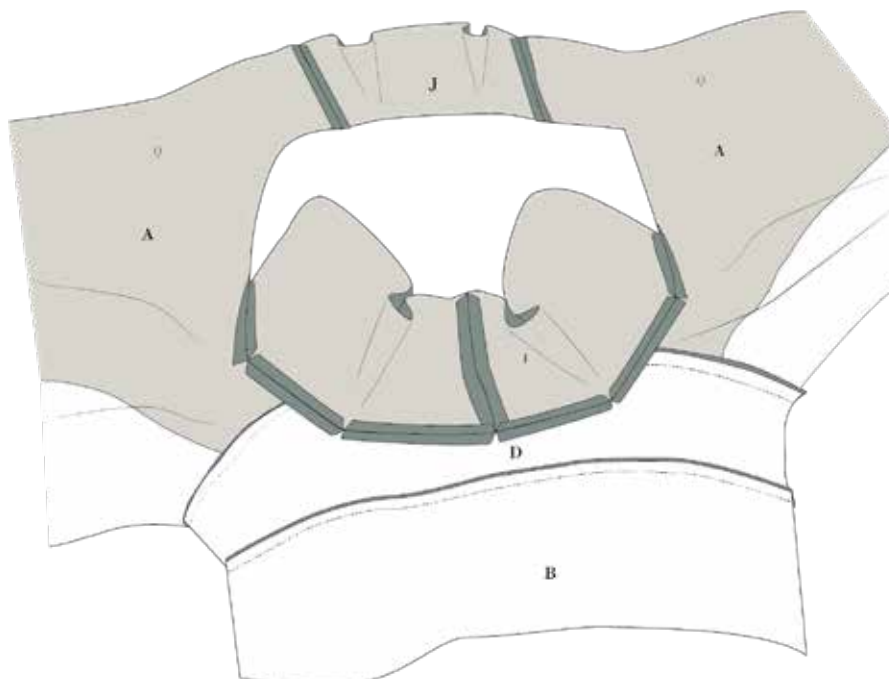


25. Sew the upper - and under collar together from corner to corner, right sides together. Make sure not to catch the seam allowance from your previous seams.

26. The last part of the collar is the front piece (A). Fold at center front line, right sides together, and stitch from center front to the point where the collar is attached to the front piece. The facing is a part of the front piece (A)

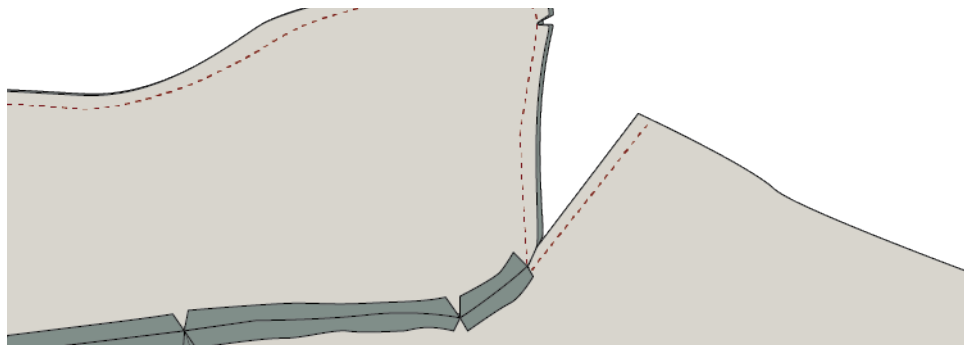





27. Cut down the seam allowance on the undercollar to 0.5 cm and clip notches to the corner of the collar.

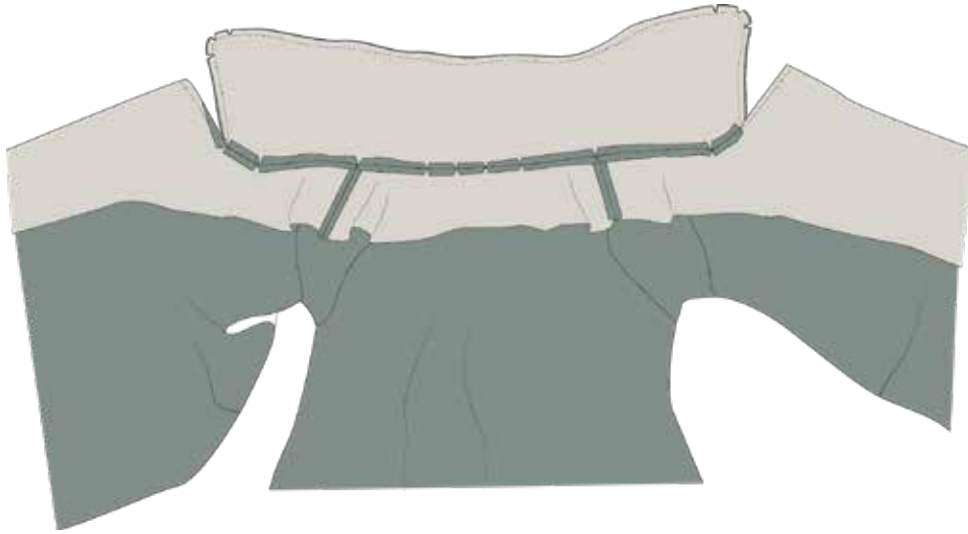

28. Turn and press the collar.


29. Sew the seam allowance from the two collars together in the neckline by hand. The seam allowance is pressed open so it is only the seam that is pressed towards the back you should sew together. Sew from shoulder seam to shoulder seam.

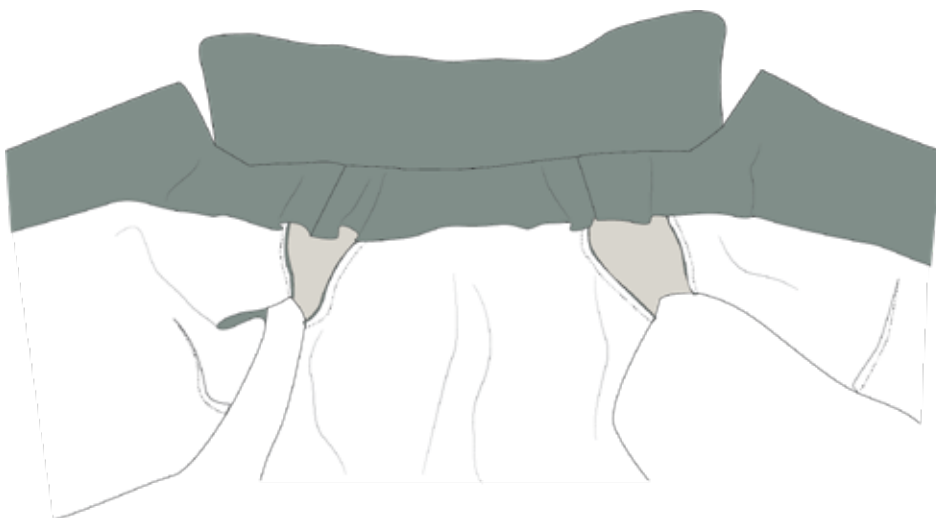




SEW THE SLEEVES

30. Sew the long sleeve seam, right sides together.
31. Sew the short sleeve seam, right sides together.
32. Press all seams open.
33. Press a 4 cm. wide interfacing piece to the hemline. See a guide on how to make it.

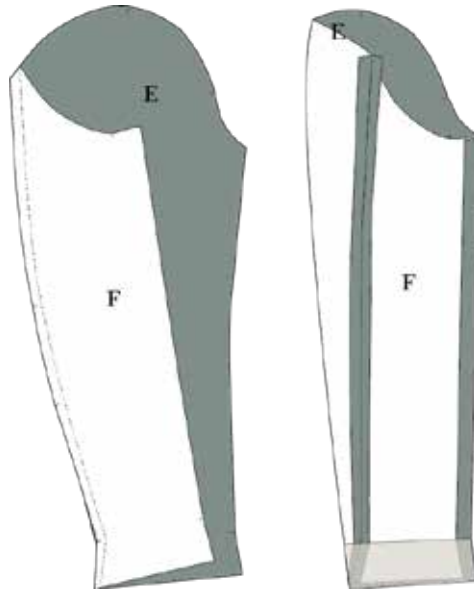

34. Fold and press the hemline according to the notches.
35. Sew the sleeves to the armcye. The sleeve has ease. See here how to sew in a sleeve with ease.

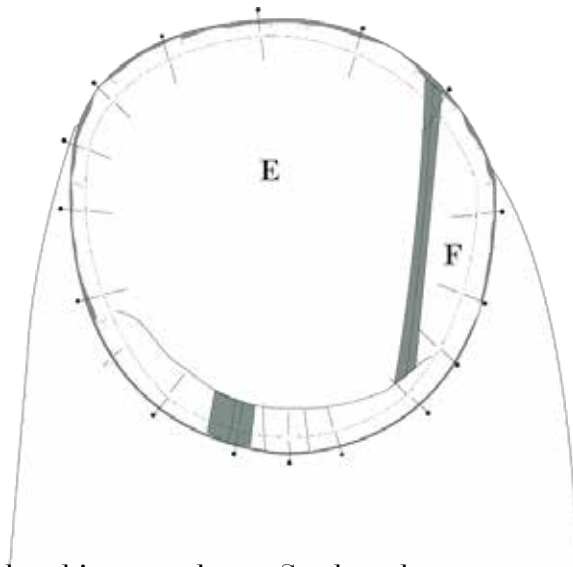

36. Sew sleeve head in your sleeve. See here how to.
 37. Sew shoulder pads in your shoulder. See here how to.
-




SEW THE LINING

38. Sew the center back pleat according to the markings on the pattern, right sides together. Press the pleat to one side.

39. Sew the side seams, right sides together.

40. Sew the shoulder seams.

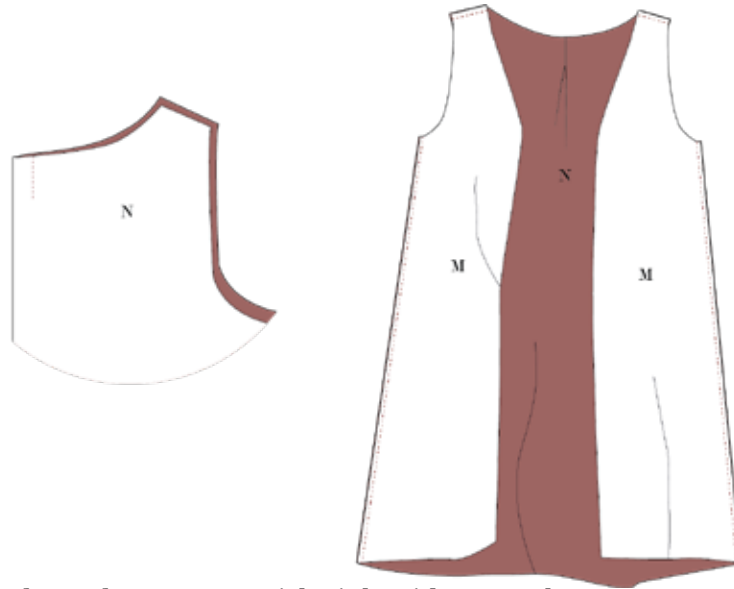


41. Sew the long sleeve seam with right sides together.

NOTE! LEAVE AN OPENING OF 12 CM IN ONE OF THE SLEEVE SEAMS. REMEMBER TO BACKSTITCH. IN THIS HOLE, YOU WILL TURN THE COAT THROUGH WHEN DONE.

42. Sew the short sleeve seam with right sides together.

43. Press all seams open.

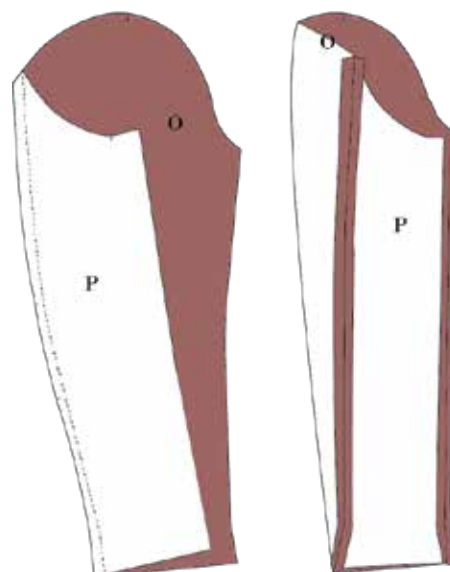

44. Sew the sleeves to the armcye. The same way as in the fabric.




ASSEMBLE THE COAT

45. Place the lining inside the coat, wrong sides together.

46. Sew the lining to the jacket – starting with the sleeves. See a video on how to sew the sleeves.

47. Pin the lining to the coat along the facing. From the bottom to the neck and back to the bottom at the other side. The two markings on the front lining (M) add extra ease – make a pleat according to those notches.

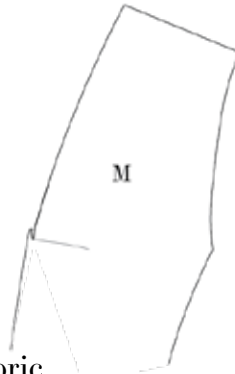

48. Sew the lining to the fabric.

49. Turn the coat inside out. Fold the facing so it is placed with right sides together at the front. At the hemline sew with 1 cm. from center front to the seam between facing and lining. Fold the lining from the facing down to the hemline over the 7 cm that has no interfacing on (from point 38.) continue the seam with 1 cm. leave an opening of 20 cm. center back. Repeat this on the other side and turn your coat to the right side again.



50. Press the hemline all the way around and make sure the interfacing is attaching inside the hem (if you have added the interfacing band) if not hem with a catch stitch.

51. Through the hole in the sleeve, pull the bottom of the jacket and sew the hole of 20 cm.

52. Now close the hole in the sleeve by hand.



53. Make horizontal buttonholes at center front. Make the first buttonhole 2.5 cm. down from the neckline, and approximately 10 cm. between all buttonholes depending on the size of your buttons.

54. place the buttons on the coat according to the buttonholes and sew the buttons to the coat.

